

MilleniumTM



**SHRINK
WRAPPING
MACHINES**



Discover the New Breed of Packaging

SHRINK TUNNELS



SW Series - SHRINK WRAPPING MACHINES

Description

- Hot-wind and Down-cyclone structure, intelligent temperature control, AC speed regulation, SS heaters that ensure fast heating-up and long service time. Teflon mesh belt conveyor or roller type conveyor.

Salient Features

- Both the height of tunnel and chamber opening on two sides are adjustable in A-Series.
- Model 3020A & 4252A are designed with single blower
- Model 4535LA & 6535LA are designed with longer chamber to obtain optimal shrinking effect at higher speed.
- Air-flow volume can be adjusted as per the requirements by means of the plate with adjustable vents inside the tunnel
- Machines are fitted with castor wheels for portability.


Application

- The machines (A & LA Series) are suitable for a variety of films, such as PVC, POF, PP etc.
- The machines (L & M Series) are suitable for a variety of films, such as PVC, POF, PP etc. and especially for PE

Technical Specifications

Model	3020A	4252A	4535LA	6535LA
Machine Dim.	1200x500x1050	1200x650x1100	1600x650x1200	1600x850x1200
Tunnel Dimension	900x300x50~200	900x450x50~250	1200x450x50~350	1200x650x50~350
Conveyor Loading	10	10	30	30
Conveyor Speed (M/min)	0~10	0~10	0~10	0~10
Power supply	1Ø, 220V, 50Hz	3Ø, 380V, 50Hz	3Ø, 380V, 50Hz	3Ø, 380V, 50Hz
Power (kw)	5.0	6.5	9.6	9.6
Net Weight (Kg)	60	90	120	150
Applicable Film	POF/PVC	POF/PVC	POF/PVC/PE	POF/PVC/PE

Heavy Duty Shrink Tunnel for Frozen Meat Boxes MS Structure - SS Cladding

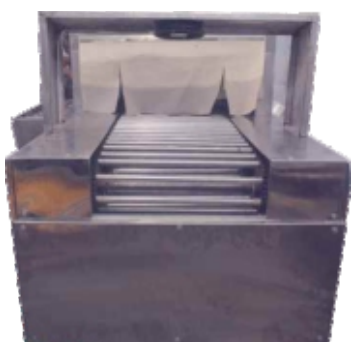

Technical Specifications

Chamber Opening	750x300mm
Infeed Conveyor	600mm
Outfeed Conveyor	12500mm
Chamber Length	1150mm
Conveyor Width	600mm
Power	3Ø440V, 20kwh

Salient Features

- SS Roller
- Solid robust fabrication with powder coated structure and SS Cladding
- Digital Temperature controller Variable Speed (AC frequency inverter drive)
- Modular fan for cooling tower
- SS Fin type heaters
- Branded electrical components
- extra protection for each & every electrical component

LABEL SHRINK PACKAGERS



Technical Specifications

Model	SM 1230	SM 1540
Machine Dim.	1800x600x1560	1543x494x1467
Tunnel Dimension	1500x1200x300	1000x150x400
Max pkg. size Dia X H(mm)	Ø100x280	Ø120x400
Packing Speed (pcs/h)	8000-12000	8000-12000
Net Weight (Kg)	210	130
Power (kw)	15	3.5
Power supply	3Ø, 380V, 50Hz	
Applicable Film	POF/PVC/PET	



SHRINK TUNNELS

Millenium™

Technical Specifications

Model	5530L	5540L	5530M	5540M
Machine Dim.	3100x850x1500	3100x850x1600	2550x850x1500	2550x850x1600
Tunnel Dimension	2000x550x300	2000x550x400	1450x550x300	1450x550x400
Conveyor Loading	60	60	30	30
Conveyor Speed (M/min)	0~10	0~10	0~8	0~8
Power supply	3Ø, 380V, 50Hz	3Ø, 380V, 50Hz	3Ø, 380V, 50Hz	3Ø, 380V, 50Hz
Power (kw)	24	27	20	23
Net Weight (Kg)	350	400	260	300
Applicable Film	POF/PVC/PE	POF/PVC/PE	POF/PVC/PE	POF/PVC/PE

L-Sealers



Technical Specifications

Type	Semi Automatic	Pneumatic	Manual
Machine Dim.	1569x710x1060	1569x710x1060	1400x650x900
Max packaging size L+H(mm) H<200	≤500	≤500	≤500
W+H(mm) h<200	≤400	≤400	≤400
Max sealing size(mm)	550x450	550x450	550x350
Packing Speed (pcs/h)	800-1000	800-1200	400-500
Net Weight (Kg)	125	135	100
Power (kw)	1.2	1.2	1
Power supply	1Ø220V 50Hz		
Air Pressure (Kg/cm ²)	6-8		
Applicable Film	POF/PVC		

2 in 1 Shrink Packager (Chamber Type)

Technical Specifications

Model	FM 4030	FM 5540	FM 8060
Machine Dim.	1202x568x1005	1370x670x1080	1853x1011x1093
Max packaging size L+H(mm) H<150	≤350	≤450	≤700
W+H(mm) h<150	≤250	≤330	≤500
Max sealing size(mm)	400x300	500x400	800x600
Packing Speed (pcs/h)	500-800	500-800	500-800
Net Weight (Kg)	115	130	250
Power (kw)	3.8	4.8	6.5
Power supply	1Ø220V 50Hz		
Applicable Film	POF/PVC		



AUTOMATIC L SEALERS & TUNNELS



Technical Specifications

Model	FL 5545 TBA/TBB	FL 6560 TBA/TBB	SM 4525
Machine Dim.	1685x828x1480	1940x1000x1480	1300x700x1465
Packaging size -			
L+H(mm) H<130	≤500	≤600	700x350x200
W+H(mm) h<130	≤430	≤570	700x350x200
Max sealing size(mm)	550x450	650x600	
Packing Speed (pcs/M)	15-25	15-25	0-15M
Net Weight (Kg)	225	300	260
Power (kw)	2.5	3	9
Power supply	1Ø, 220V 50Hz	1Ø, 220V 50Hz	3Ø, 380V 50Hz
Applicable Film	POF	POF	POF

SIDE SEALING & TUNNEL - HIGH SPEED

Technical Specifications

Model	FL 5545 TBC/M	FL 5560 TBC/M	FL 5580 TBC/M	SM 5030
Machine Dim.	1680x975x1500	1820x1040x1500	2430x1565x1400	1672x770x1560
Packaging size L	Unlimited	Unlimited	Unlimited	1000x400x250
Packaging size W+H	≤430	≤550	≤750	
Cross Sealing L/H	450/150	600/150	800/150	
Packing Speed (pcs/M)	20-40	20-40	20-40	0-15M
Net Weight (Kg)	290	310	675	360
Power (kw)	1.8	2	2.2	12
Power supply	3Ø, 380V 50Hz	3Ø, 380V 50Hz	3Ø, 380V 50Hz	3Ø, 380V 50Hz
Applicable Film	POF	POF	POF	POF



WEB SEALER & SHRINK TUNNEL

Technical Specifications

Model	ST 6030	SM 6040 S/SM
Machine Dim.	1129x1305x1991	2400x900x1690
Tunnel Dimension	-	1500x600x400
Max Packaging size	500x300x300	1300x400x300
Sealing size	700	-
Temperature (°C)	0-200	0-300
Packing Speed (pcs/M)	5-8	15-20
Net Weight (Kg)	300	500/550
Power (kw)	1	20
Power supply	3Ø, 380V 50Hz	3Ø, 380V 50Hz
Air Pressure (kg/cm ²)	6-8	-
Applicable Film	PE	PE



AUTO MATRIX FORMATION, SLEEVE SEALING & SHRINK TUNNEL (with/without Tray)

Technical Specifications

Model	ST 6030 AH	SM 6040 M
Machine Dim.	1384x2716x1991	2800x900x1690
Tunnel Dimension	-	1800x600x400
Max Packaging size	400x300x300	1500x400x300
Sealing size	700	-
Temperature (°C)	0-200	0-300
Packing Speed (pcs/M)	6-14	25-30
Net Weight (Kg)	490	650
Power (kw)	1.5	24
Power supply	3Ø, 380V 50Hz	3Ø, 380V 50Hz
Air Pressure (kg/cm ²)	6-8	-
Applicable Film	PE	PE



FRONTAL FEEDING AUTO WEB SEALER & SHRINK TUNNEL

Technical Specifications

Model	ST 6030 Z	SM 6040
Machine Dim.	1818x1311x2132	2800x900x1690
Tunnel Dimension	-	1800x600x400
Max Packaging size	∞x500x300	1500x400x300
Sealing size	700	-
Temperature (°C)	0-200	0-300
Packing Speed (pcs/M)	8-22	25-30
Net Weight (Kg)	500	600
Power (kw)	2	24
Power supply	3Ø, 380V 50Hz	3Ø, 380V 50Hz
Air Pressure (kg/cm ²)	6-8	-
Applicable Film	PE	PE



PACKAGING MACHINES



SEMI AUTO STRAPPING



CARTON SEALERS



FULLY AUTO STRAPPING



CONTINUOUS SEALERS



CARTON WRAPPING



PALLET WRAPPING

PACKAGING CONSUMABLES



SELF ADHESIVE TAPES



PP STRAPPING ROLLS



STRETCH FILMS



SHRINK FILMS



PET STRAPPING ROLLS

MilleniumTM
Packaging Solutions

132, Mohammadpur, Bhikaji Cama Place, New Delhi - 110066. INDIA

Phones : +91 11 26166610, Telefax : +91 11 26106352 Service Helpline : +91-9711211569, Sales Enquiries : +91 98112 08210, 9873000860

E-mail : sales@milleniumpackaging.in ; Web.: www.milleniumpackaging.in ; www.milleniumpack.com

Note : Accessories shown in the pictures may not be the part of standard equipment.

The Company follows an ongoing process of continuous product development and upgrading the equipments, hence reserves the right to alter the specifications at any time without prior notice. Actual machine may differ from the pictures shown in the catalogue.